




inicombi



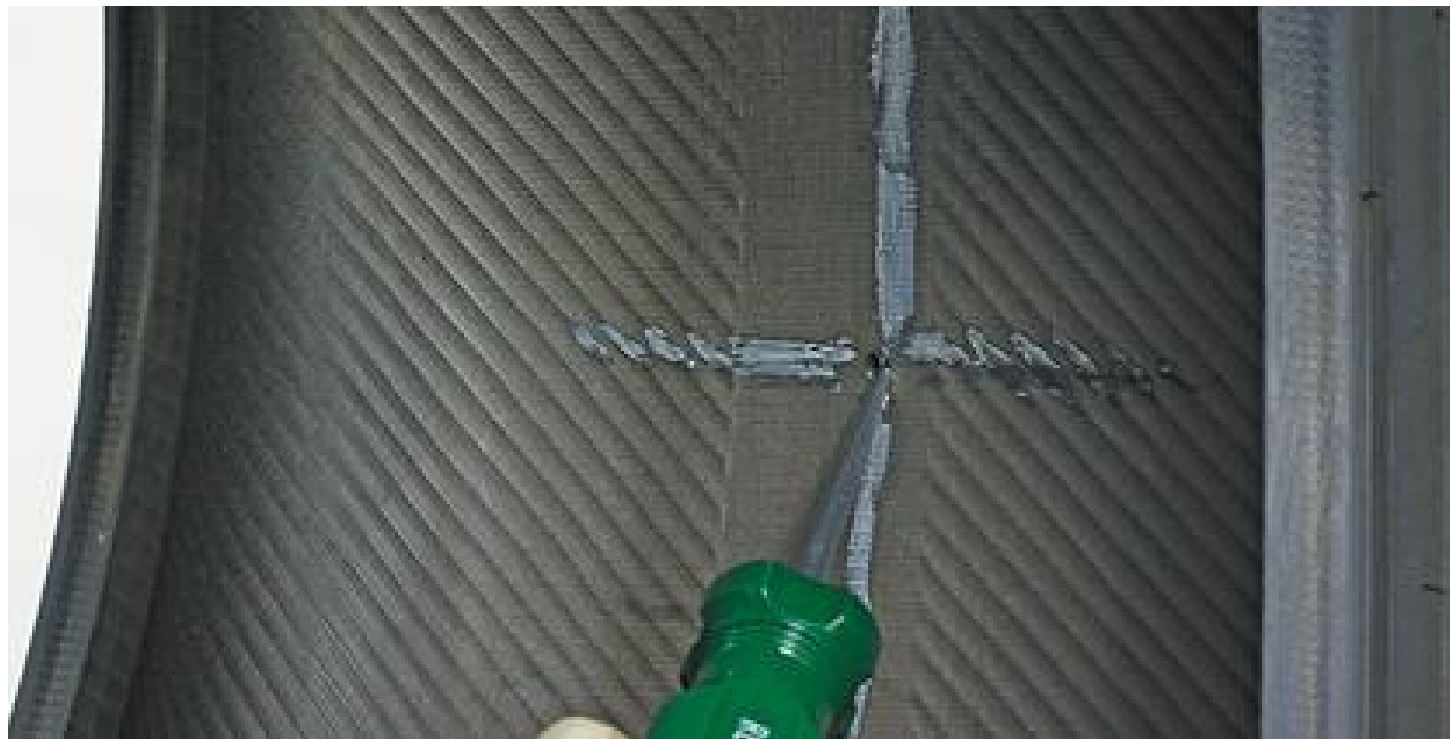

1.

μ

μ

μ

μ .



2. μ μ μ μ

μ



μ

μ



μ

.



10.

μ

μ

μ

μ

μ

μ μ

1200


μ

μ

μ 3-4

μ

.

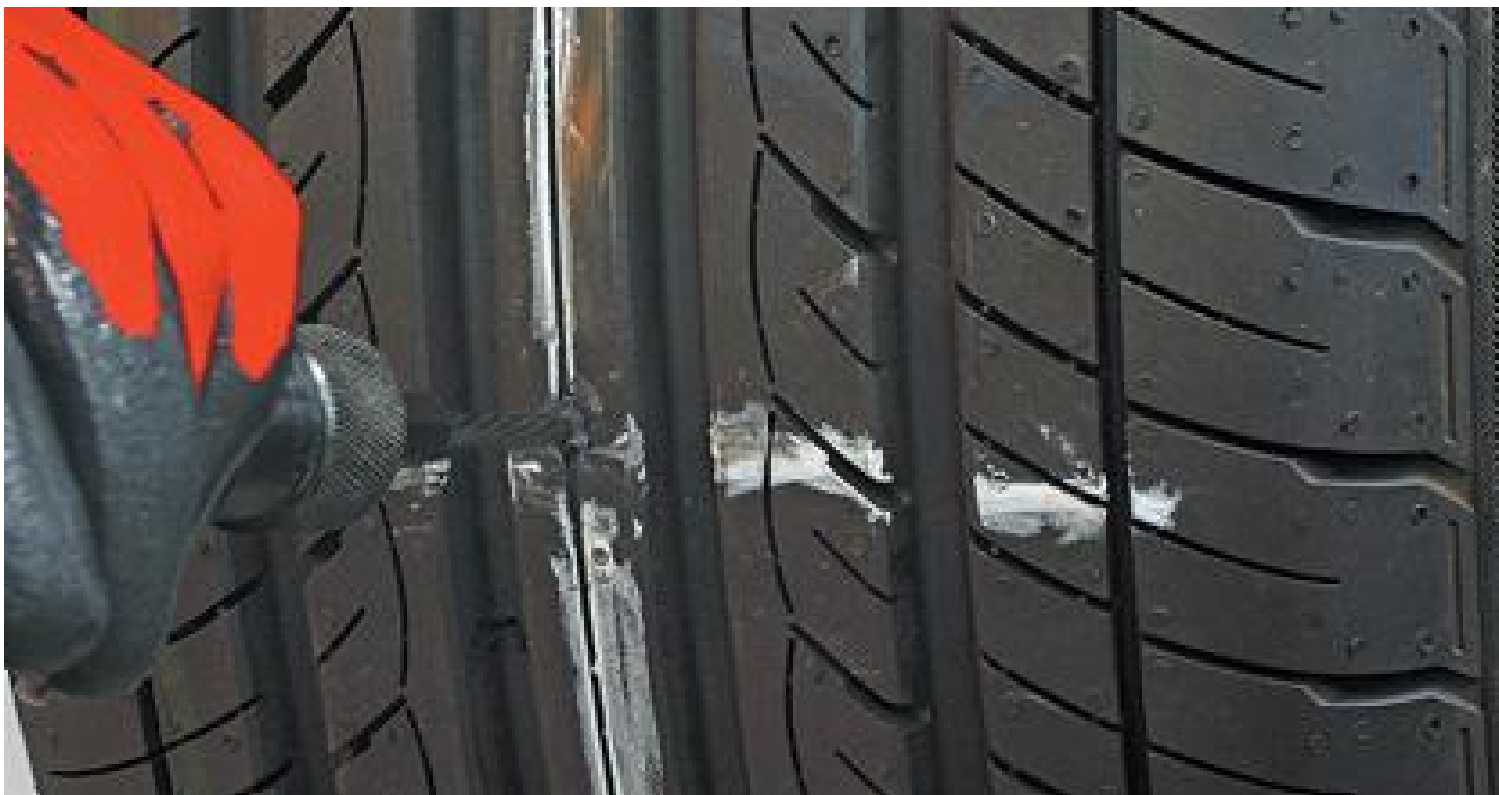

10.

μ

μ

μ 3-4

μ



μ

μ

μ

μ

2500 r.p.m



To


μ (GRIT)

60 GRIT

μ

36 GRIT

.

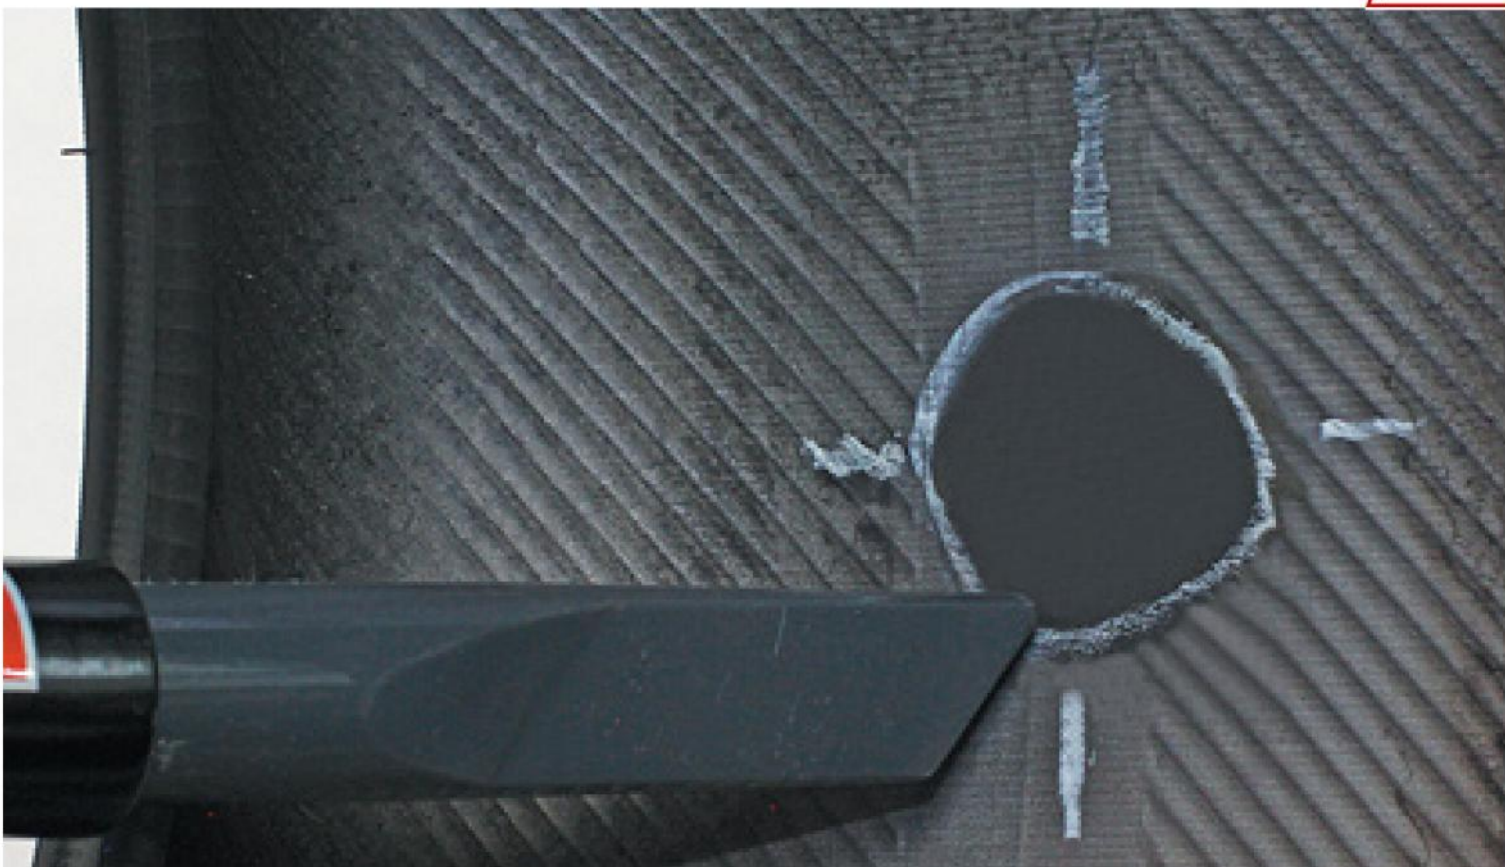

13.

μ μ



μ μ

μ

μ

μ LIQUID BUFFER

μμ




μ μ BL TIP TOP μ



15.

μ μ μ μ BL TIP TOP μ μ .
 μ μ 3-6 μ μ .
 μ .

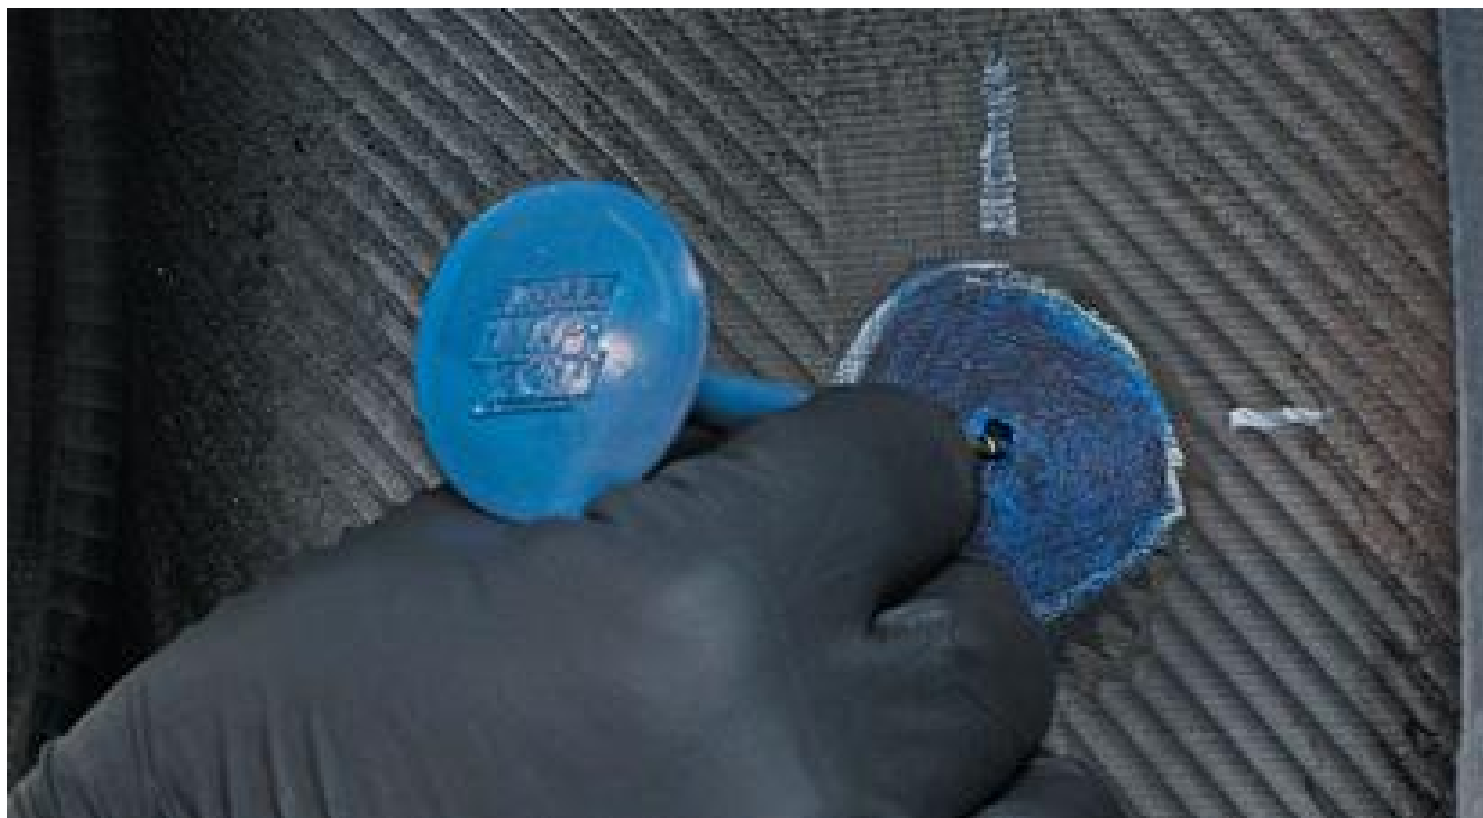

μ μ mini combi .



μ μ

mini combi


.



μ μ μ mini combi.



19. μ mini combi μ . μ

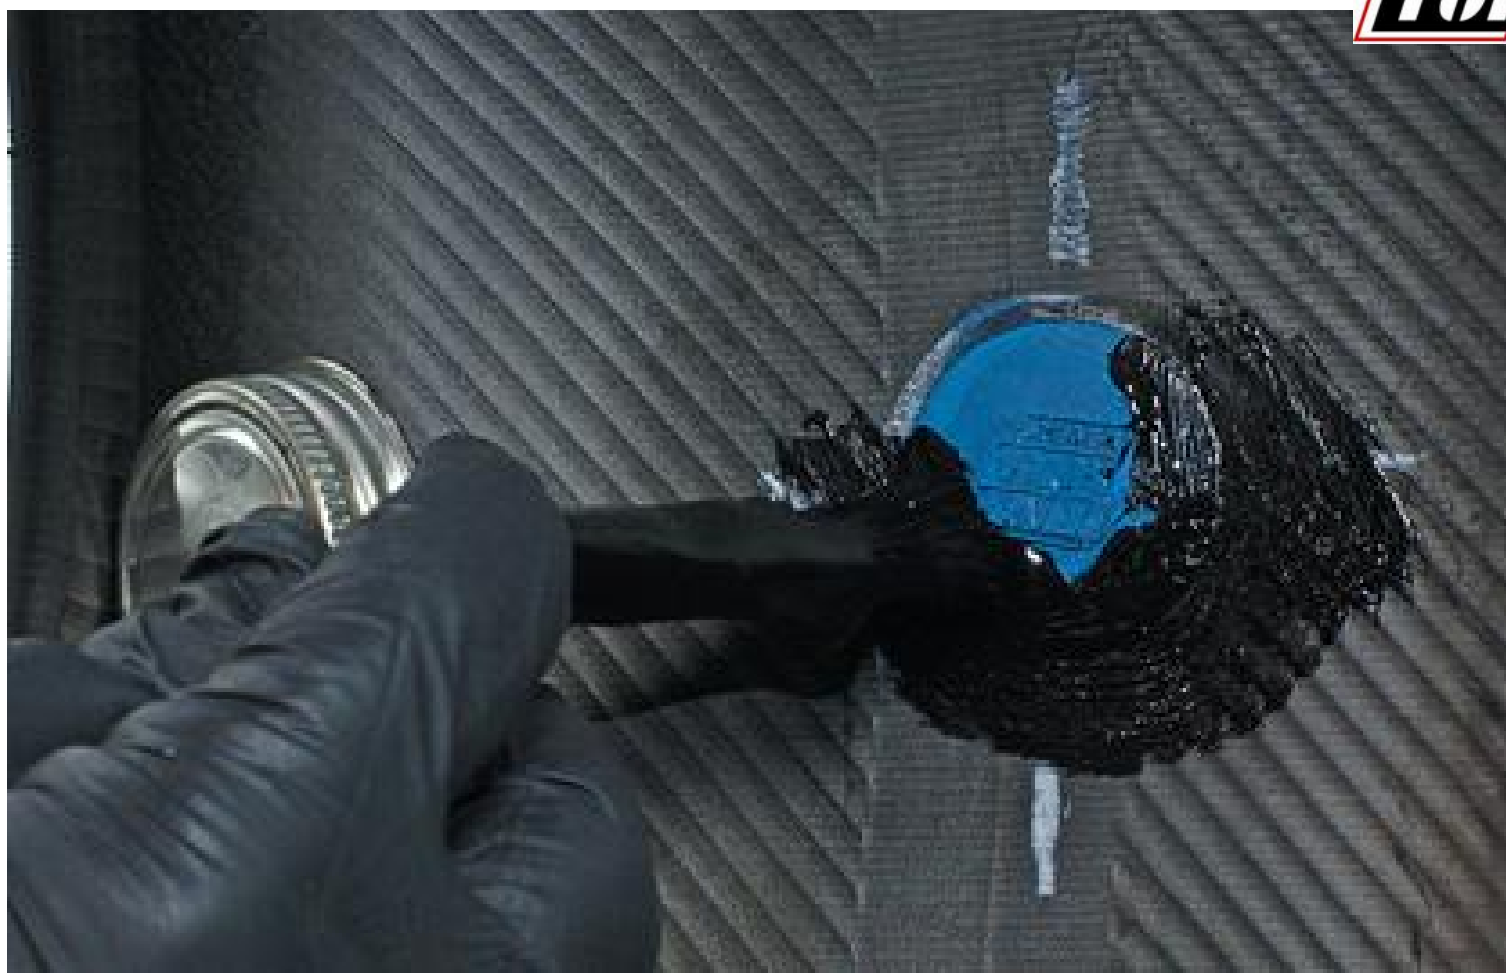


μ μ
μ

INERLINER SEALER

μ

μ

μ

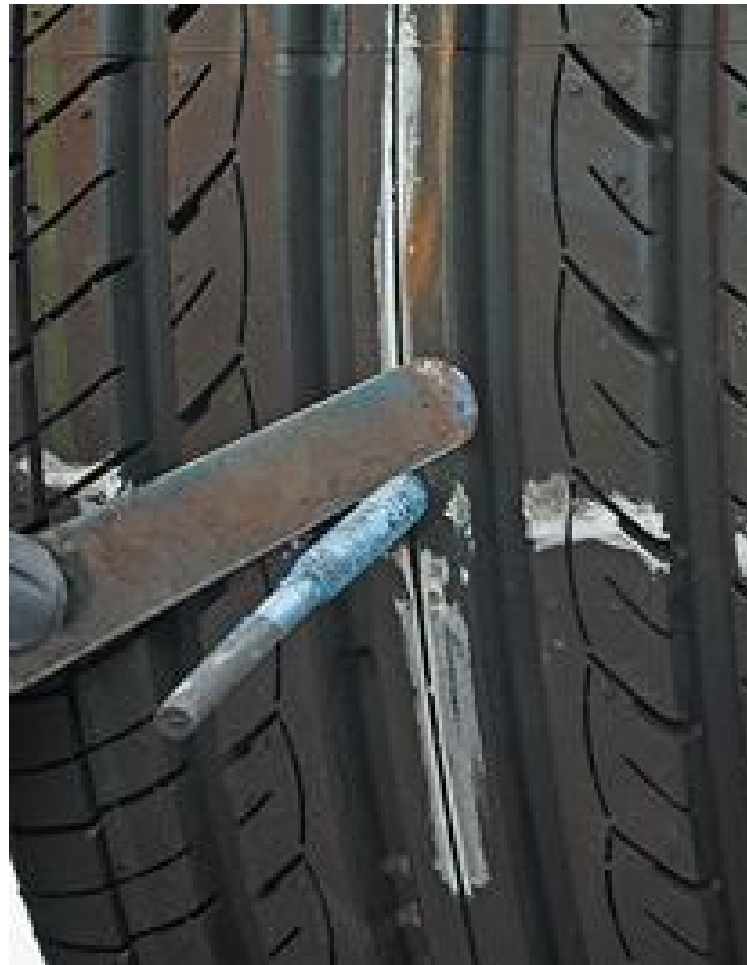

μ μ μ μ

3-4

μ

mini combi



μ

μμ

μ



μ mini combi

1. .
2. μ μ μ μ μ
3. μ μ μ .
4. μ μ μ . μ
5. μ μ μ .

