


1

μ

μ


μ

μ .

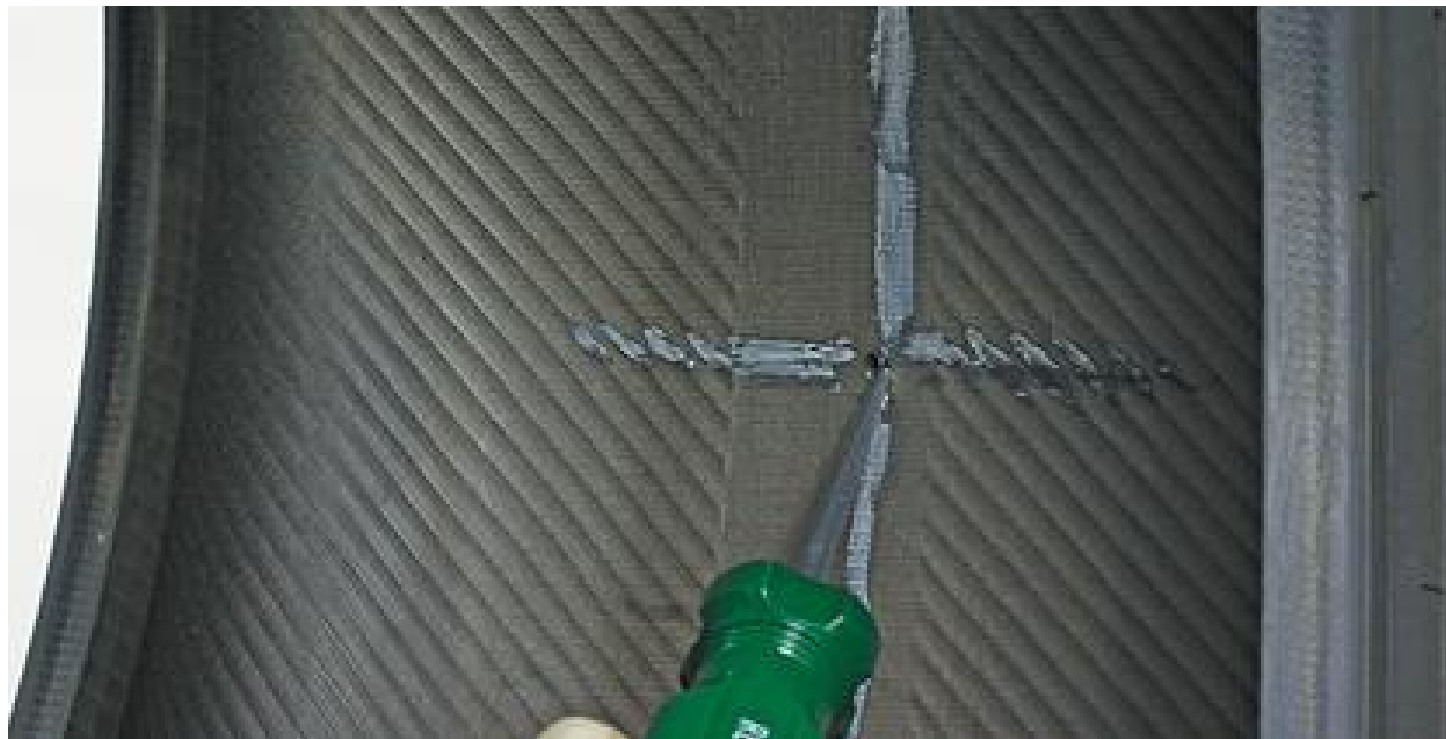

μ μ μ μ

μ

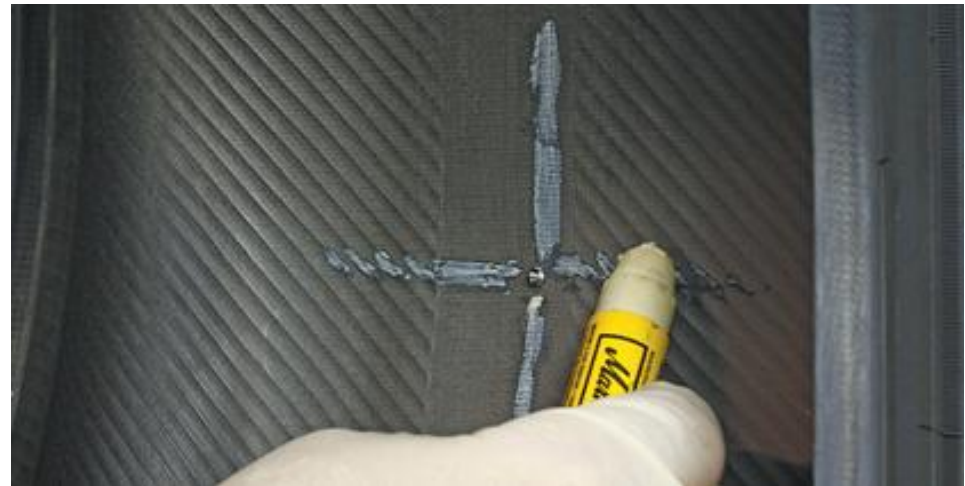

μ

μ



μ

μ μ μ

μ



μ

μ

μ

μ

2500 r.p.m





To μ (GRIT)

60 GRIT

μ

36 GRIT



μ μ μ μ μ .



μ μ

μ

μ

μ LIQUID BUFFER

μμ





μ μ μ μ
 μ
 3-6


BL TIP TOP

μ
 μ
 μ


μ .
 μ .



μ μ μ μ μ μ .
μ μ μ μ μ .

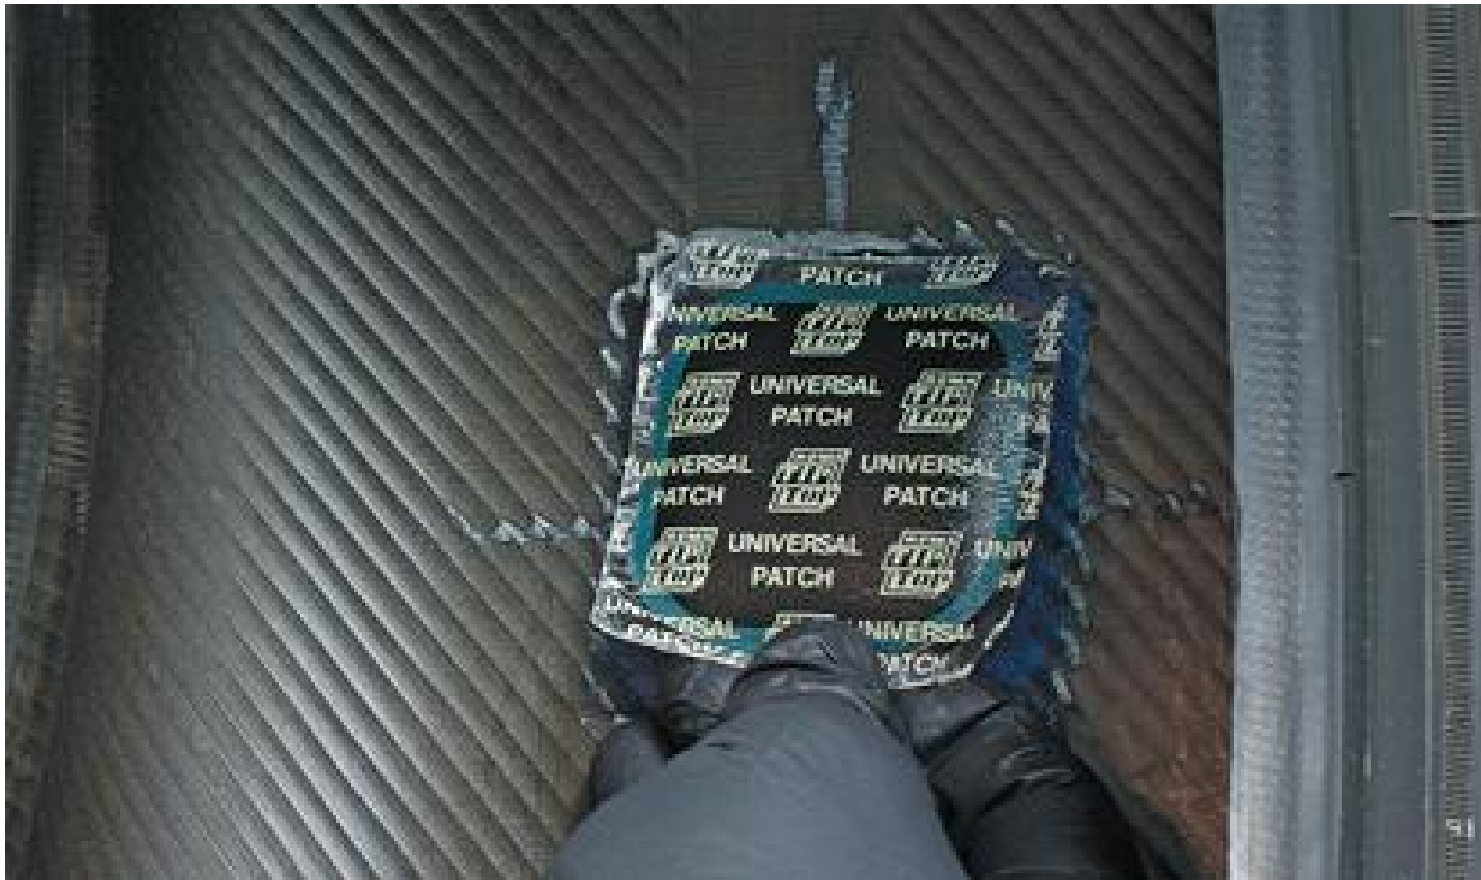

μ
μ μ μ μ .
μ .

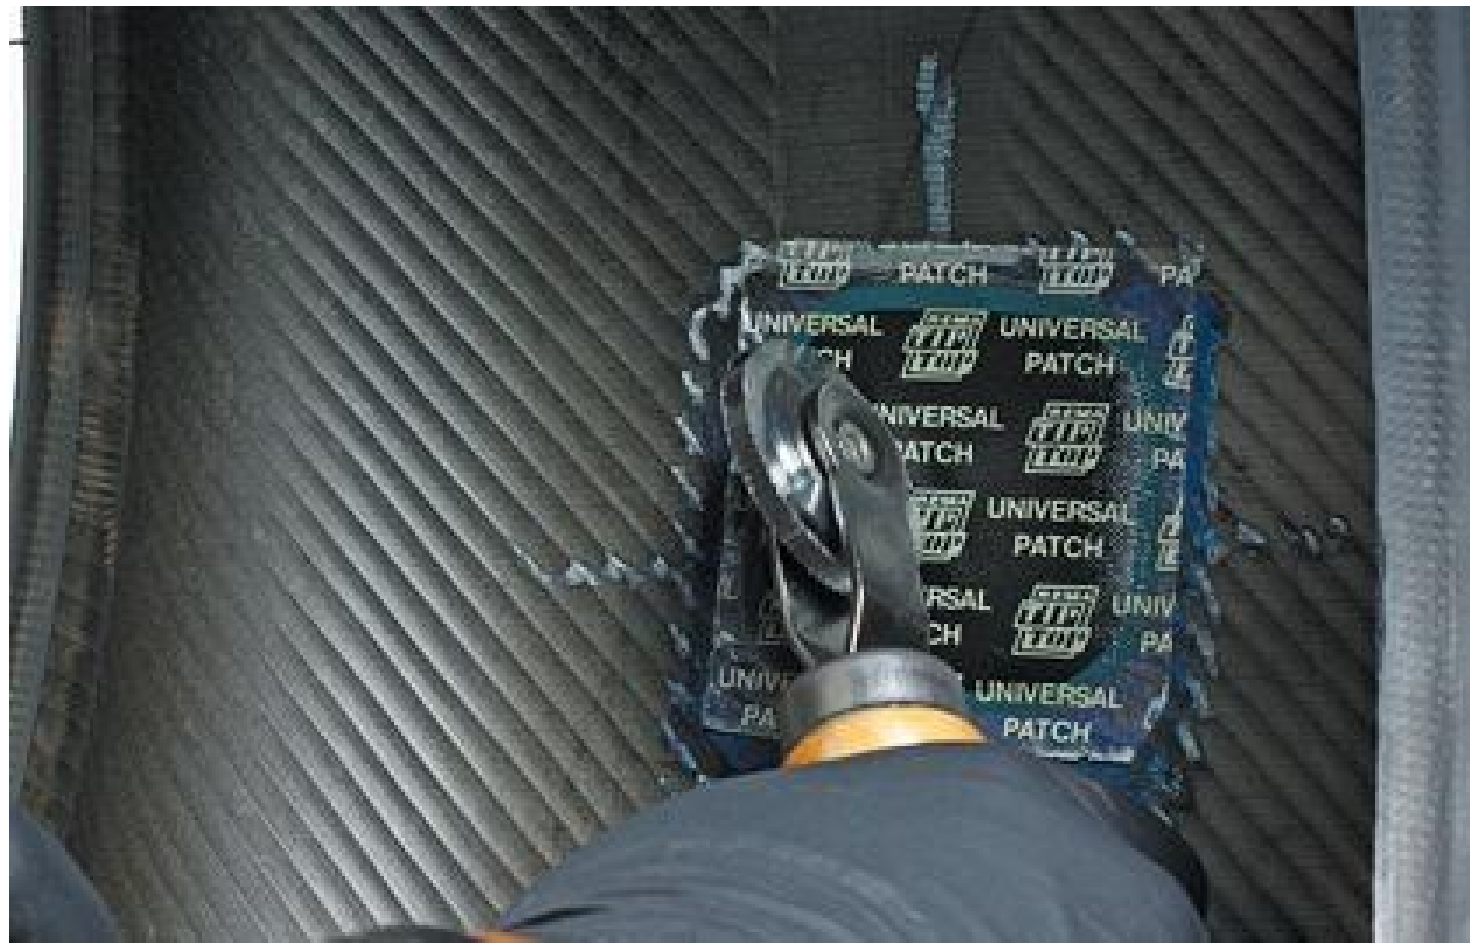



μ μ INERLINER SEALER μ
μ
INERLINER SEALER

μ . μ μ
μ .



μ 2500r.p.m
μ
μ
μ .





μ

.





μ μ μ μ μ μ μ μ μ μ μ μ



